
| Mod | Date | Modification | |
|-----|------|--------------|--|
| | | | |

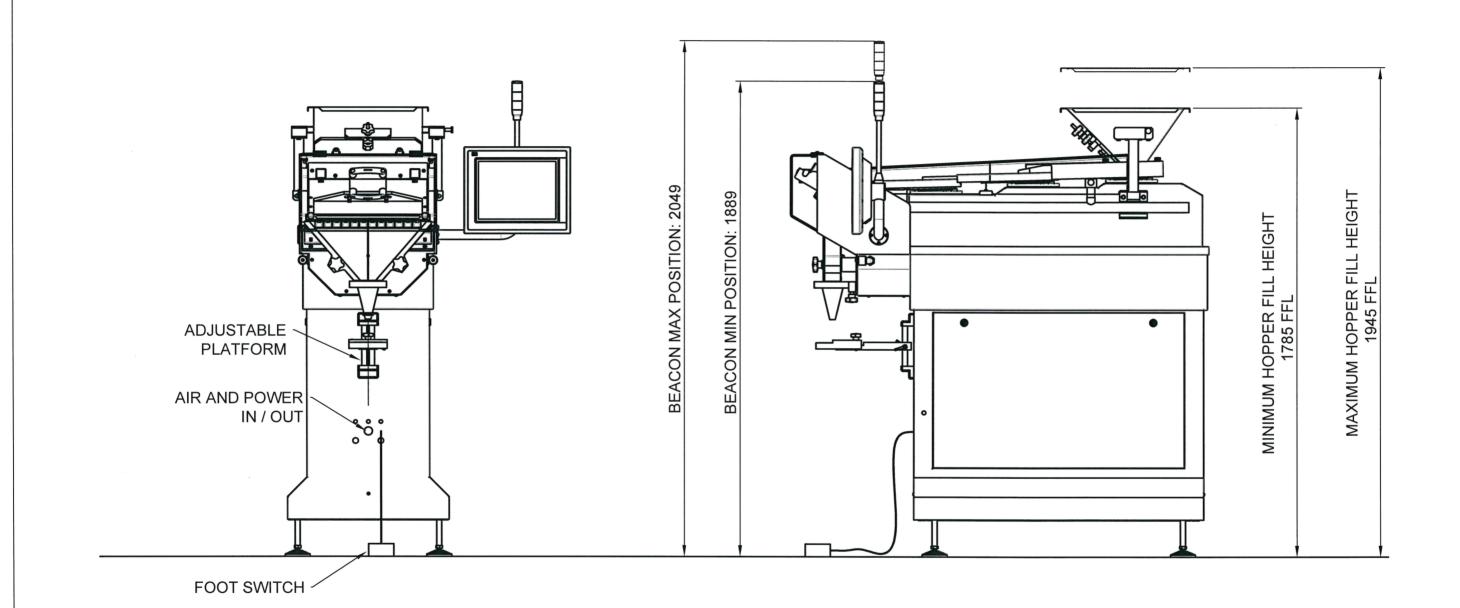

| | SWIFTVISION III SINGLE TABLET COUNTER | M6980 | 27 | MIN: 1785 MAX: 1945 | 2049 BEACON AT MAX POSITION | 915 | 2 | 16 | 230 | 1 | 50 | 110 | 100L/SEC | 50L/SEC | | APPROXIMATE TOTAL WEIGHT 480KG APPROXIMATE LOAD PER FRONT FOOT 130KG APPROXIMATE LOAD PER REAR FOOT 110KG | | |
|-----------|---|----------------------------------|--------------------|---|--------------------------------|---|--|-------------|--|---------------|-------------------|---|---|---|-------------------|---|------|--|
| ITEN | MACHINE DESCRIPTION | MACHINE | HOPPER SIZE (L) | HOPPER/BOWL FILL HEIGHT (MM FFL) | MAX HEIGHT (MM FFL) | CONVEYOR / SURFACE HEIGHT (MM FFL) | POWER (KW) | AMPS (A) | VOLTAGE (V) | PHASE (PH) | FREQUENCY (HZ) | AIR CONSUMPTION (L/MIN @6 BAR UNLESS OTHER WISE STATED) | DUST EXTRACTION @ TRAYS (L/SEC) IF REQUIRED | DUST EXTRACTI @ NOZZLE (L/SEC) IF REQUIRED | ON | ADDITIONAL INFORMATION | | |
| 0 | MAINS ELECTRIC POINT | PRODUCT TRAVEL LEFT - TO - RIGHT | | | | | CAMETA MOLON III TARLET COLINITER MUTTU AR MUSTARI E RI ATECRA | | | | | | Drawn | NIH | Chkd | MM Appr | MAR | |
| \otimes | MAINS AIR POINT - 12mm (1/2") @ 6 BAR | | | | | | | | | | | | | INOLL | 0.000 | TO GOT STATE | 11/2 | |
| | CEILING HEIGHT TBC | | | | | | | | | | | | Scale | 1:15 | Date | 26/11/2020 | | |
| | liability concerning the design of the workplace (spaces designated for workers, outflows, etc.) which remains the total responsibility of the customer, who must ensure that the machines have the minimum room required to enable operators to move freely and safe access to adjustment and maintenance areas. | | | | | | | | SAFE SWIFTPACK THIS DOCUMENT CONTAINS (NOW-HOW OF THE COMPANY THAT PRODUCED IT. ALL RIGHTS RESERVED, REPRODUCTION AND DISCLOSURE FORBIDDEN. IMA Swiftpack Ltd. | | | | | | SL7475 ORIGINAS 0 | | | |